

# REFRIGERATORS

A solution  
to any need

Angelo Po refrigerators take great care of any type of food and dish, ensuring maximum freshness and quality: choosing the best ingredients in the kitchen and properly storing them to keep them fresh every day are the secrets to give a unique flavor to any dish.

**X-Cel** models were designed to ensure maximum reliability and large energy savings. Furthermore, with the **X-Cel** and **X-Tra Plus** ranges, it is possible to obtain a perfect hygiene in a short time and very easily. Such hygiene is synonym of quality and food safety: the storage compartment has press-formed side walls made of AISI 304 stainless steel.

**Free-Go** models allow to satisfy any conservation and storage requirement, in addition to ensuring a high degree of application flexibility.


GAMMA  
700 mmICON9000  
920 mmICON9000 PLUS  
920 mmOMEGA  
1100 mm

MONOLITHE

ACT.O - FX - BX -  
FIT combiCHILL  
❄️❄️❄️

# REFRIGERATORS

## X-CEL • X-TRA PLUS

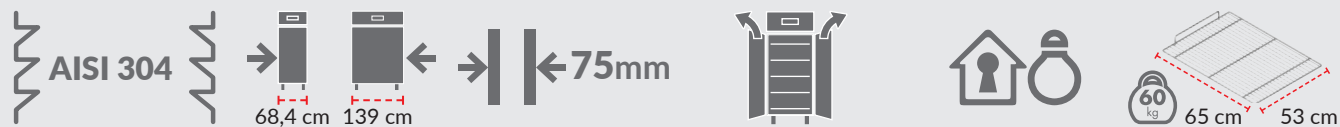

Press-formed  
side walls

Optimized width

Insulation thickness

Reversible door  
during on-site  
installation

Lighting and  
key-operated lock

Grids and trays  
GN 2/1

## X-CEL

High energy efficiency

- One-piece construction internal and external made of AISI 304 stainless steel, including bottom, back and ceiling
- Storage chamber made of AISI 304 stainless steel, pressed-formed internal sides, 20 levels
- Ventilated cooling system
- Refrigerant fluids: R600a by positive temperature models, and R290 by negative temperature models
- Evaporator positioned outside the refrigerating chamber with anti-corrosion treatment
- Reliability guaranteed up until room temperature +43°C (T)
- Control panel with electronic circuit board, HACCP alarms signalling and USB port for data download
- **Highly energy-efficient power unit**
- Each compartment is delivered as standard with: n. 4 stainless steel AISI 304 grids.

## X-TRA PLUS

Maximum hygiene

- One-piece construction internal and external made of AISI 304 stainless steel
- Storage chamber made of AISI 304 stainless steel, pressed-formed internal sides, 20 levels
- Ventilated cooling system
- Refrigerant fluid: R290
- Evaporator positioned outside the refrigerating chamber with anti-corrosion treatment
- Reliability guaranteed up until room temperature +43°C (T)
- Control panel equipped with digital thermometer-thermostat
- Each compartment is delivered as standard with: n. 3 plastic-coated grids.

### Models for pre-set remote cooling:

- Refrigerant fluids: R134a by positive temperature models, and R452a by negative temperature models
- Evaporator positioned inside the refrigerating chamber with anti-corrosion treatment.

A



XL70L





TX70

# REFRIGERATORS

## FREE-GO

→ | ← 75mm



Insulation thickness

Reversible door during on-site installation (except glass door)

Lighting and key-operated lock

Mod. ...70 and ...150 grids and trays GN 2/1

Mod. ...60 and ...130 grids and trays

## FREE-GO

Convenience multiplies

**EX...**

One-piece construction internal and external made of **AISI 304 stainless steel**

**EF...**

One-piece construction internal and external made of **special ANTI-FINGERPRINT steel**

- Storage chamber equipped with shelf supports in AISI 304 stainless steel, 20 levels
- Ventilated cooling system
- Refrigerant fluids: R134a by positive temperature models, and R452a by negative temperature models
- Evaporator positioned inside the refrigerating chamber with anti-corrosion treatment
- Reliability guaranteed up until room temperature +43°C (T) (except models ...PV)
- Control panel equipped with digital thermometer-thermostat
- Each compartment is delivered as standard with: n. 3 pairs of AISI 304 stainless steel guides and n. 3 plastic-coated grids.

  
AISI 304




EX70L



EF70T

**Special Anti-fingerprint Steel**



**Always Clean**

- Fingerprint resistance for easier cleaning and shiny surfaces at all times
- Resistance to corrosion and high temperatures.

GAMMA  
700 mm

ICON9000  
920 mm

ICON9000 PLUS  
920 mm

OMEGA  
1100 mm

MONOLITHE

ACT.O - FX - BX -  
FIT combi

CHILL ❄️❄️❄️



# ROLL-IN

## MAIN CONSTRUCTION CHARACTERISTICS



Structure made of panels  
in AISI 304 stainless steel



AISI 304 stainless steel floor




Reversible door during on-site  
installation



Lighting and key- operated lock

- Ventilated cooling system
- Refrigerant fluid: R134a
- Reliability guaranteed up until room temperature +43°C (T)
- Control panel with electronic circuit board, HACCP alarms signalling.

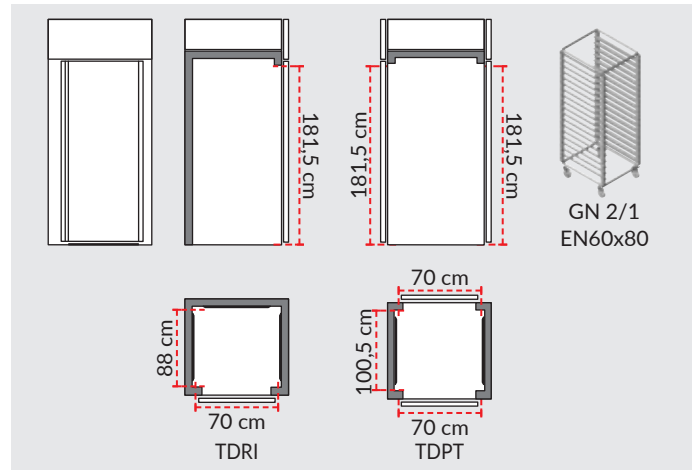




TDRI



TDPT

# REFRIGERATORS

## TECHNICAL DATA

MOD.	 *	 **	 ***	
X-Cel	XL70L	electric	A	
	XL70B	hot gas	C	
	XL150L	electric	A	
	XL150B	hot gas	C	
X-Tra	TX70	electric	C	
	TX70B	electric	D	
	TX150	electric	C	
	TX150B	electric	F	
	Remote Unit	XT70LR	electric	N/A
		XT70BR	electric	N/A
		XT150LR	electric	N/A
		XT150BR	electric	N/A
Free-Go Anti-fingerprint	EF70T	air	D	
	EF70B	electric	F	
	EF150T	air	D	
	EF150B	electric	G	
Free-Go AISI 304	EX70L	electric	D	
	EX70B	electric	F	
	EX150L	electric	D	
	EX150B	electric	G	
Free-Go AISI 304	EX60L	electric	D	
	EX60B	electric	F	
	EX130L	electric	D	
	EX130B	electric	G	
Free-Go AISI 304 Special	EX70TPV	air	E	
	EX150TPV	air	E	
	EX70CP	electric	G	
	EX70LL	electric	E	
	EX70LB	electric	N/A	
	EX150BL	electric	N/A	
Roll-In	TDRI	hot gas	N/A	
	TDPT	hot gas	N/A	

\* Defrosting and automatic evaporation of condensation.

\*\* ENERGY CLASS: on 1st July 2016, Ecodesign (EU Regulation 2015/1095) and Energy Labelling (EU Regulation 2015/1094) legislation regarding the first European energy classification label for professional vertical/counter refrigerated storage cabinets sold within the European Union will come into force.

• N/A non-applicable

\*\*\* Climate class 5: room temperature +40°C and 40% relative humidity; Climate Class 4: room temperature +30°C and 55% relative humidity.

GAMMA  
700 mm

ICON9000  
920 mm

ICON9000 PLUS  
920 mm

OMEGA  
1100 mm

MONOLITHE

ACT.O - FX - BX -  
FIT combi








CHILL  




# REFRIGERATORS

## X-CEL GN 2/1









Refrigerators with one-piece construction, internal, external, bottom, back and ceiling made of AISI 304 stainless steel. Press-formed side walls. Capacity GN 2/1. Each compartment is delivered as standard with n. 4 stainless steel AISI 304 grids.

	MOD.	DESCRIZIONE				
	 <b>XL70L</b>	REFRIGERATOR -2°C ÷ +8°C GN 2/1	68,4X80X204	0,27		230V 1N~ / 50HZ
	<b>XL70B</b>	FREEZER -22°C ÷ -15°C GN 2/1	68,4X80X204	0,67		230V 1N~ / 50HZ
	<b>XL150L</b>	REFRIGERATOR -2°C ÷ +8°C GN 2/1	139X80X204	0,54		230V 1N~ / 50HZ
	<b>XL150B</b>	FREEZER -22°C ÷ -15°C GN 2/1	139X80X204	1,35		230V 1N~ / 50HZ

# REFRIGERATORS

## X-TRA PLUS GN 2/1

Refrigerators with one-piece construction, internal, external, made of AISI 304 stainless steel. Press-formed side walls. Capacity GN 2/1. Refrigerant fluid: R290. Evaporator positioned outside the refrigerating chamber. Each compartment is delivered as standard with n. 3 plastic coated grids.

	MOD.	DESCRIZIONE	 cm	 kW	 kW	
	 <b>TX70</b>	REFRIGERATOR -2°C ÷ +8°C GN 2/1	68,4X80X204	0,22		230V 1N~ / 50HZ
	 <b>TX70B</b>	FREEZER -20°C ÷ -10°C GN 2/1	68,4X80X204	0,58		230V 1N~ / 50HZ
	<b>TX150</b>	REFRIGERATOR -2°C ÷ +8°C GN 2/1	139X80X204	0,28		230V 1N~ / 50HZ
	<b>TX150B</b>	FREEZER -20°C ÷ -10°C GN 2/1	139X80X204	0,92		230V 1N~ / 50HZ

GAMMA  
700 mm

ICON9000  
920 mm

ICON9000 PLUS  
920 mm

OMEGA  
1100 mm

MONOLITHE

ACT.O - FX - BX -  
FIT combi

CHILL  




# REFRIGERATORS

## X-TRA GN 2/1 PRESET FOR REMOTE UNIT

Refrigerators with one-piece construction, internal, external, made of AISI 304 stainless steel. Press-formed side walls. Capacity GN 2/1. Refrigerant fluids: R134a by positive temperature models, and R452a by negative temperature models. Evaporator positioned inside the refrigerating

chamber. Models ....R pre-setting for remote cooling connection. Each compartment is delivered as standard with n. 3 plastic coated grids.

GAMMA  
700 mm

ICON9000  
920 mm

ICON9000 PLUS  
920 mm

OMEGA  
1.100 mm

MONOLITHE

ACT.O - FX - BX -  
FIT combi

CHILL ❄️❄️❄️



MOD.	DESCRIZIONE				
 <b>XT70LR</b>	REFRIGERATOR -2°C ÷ +8°C GN 2/1 PRE-SET FOR REMOTE COOLING CONNECTION	68,4X83,5X204	0,4		220V/230V/240V 1N- / 50÷60 HZ
<b>XT70BR</b>	REFRIGERATOR -20°C ÷ -10°C GN 2/1 PRE-SET FOR REMOTE COOLING CONNECTION	68,4X83,5X204	0,4		220V/230V/240V 1N- / 50÷60 HZ
 <b>XT150LR</b>	REFRIGERATOR -2°C ÷ +8°C GN 2/1 PRE-SET FOR REMOTE COOLING CONNECTION	139X83,5X204	0,8		220V/230V/240V 1N- / 50÷60 HZ
<b>XT150BR</b>	REFRIGERATOR -20°C ÷ -10°C GN 2/1 PRE-SET FOR REMOTE COOLING CONNECTION	139X83,5X204	0,8		220V/230V/240V 1N- / 50÷60 HZ



# REFRIGERATORS

## X-CEL AND X-TRA ACCESSORIES

DLUSB detects and records the temperature and humidity of the compartment. TSP allows to record and print internal temperature and the pcb functions. Connectable through serial cable to the control board of appliances. For models X-CEL and Roll-in only. GR70AL remote cooling unit

for refrigerators with 1 column positive temperature. GR70AB remote cooling unit for freezers with 1 column negative temperature. GR150AB remote cooling unit for refrigerators with 2 columns, positive temperature. GR150AB remote cooling unit for freezers with 2 columns, negative temperature.

TTLINK...: compatible with Android 4.4 (or superior) devices and Blue-Tooth 4.0 or BLE 4.0, maximum distance 10 m, it can be installed on refrigerated cabinets X-TRA.

### ACCESSORIES

	MOD.	DESCRIZIONE				
	TTLINK	THERMOSTAT-THERMOMETER -2°C ÷ +8°C BLUE TOOTH 4.0 - ANDROID				
	TTLINKB	THERMOSTAT-THERMOMETER -20°C ÷ -10°C BLUE TOOTH 4.0 - ANDROID				
	DLUSB	TEMPERATURE AND HUMIDITY DETECTOR-RECORDER				
	BP21	PLASTIC CONTAINER GN 2/1 WITHOUT LID	53X65X20			
	TSP	PRINTING TERMINAL	10X10X10	0,012	230V 1N~ / 50 ÷ 60HZ	
	GP21B	PLASTIC COATED SHELF 2/1 GN FOR VERT.BOTTLES	53X65X6			
	G785X	GRID GN 2/1 MADE IN ROUND STAINLESS STEEL	53X65X6,3			
	G610X	GRID GN 1/1 MADE IN ROUND STAINLESS STEEL	53X32,5X1,2			
	GXRFS	AISI 304 STAINLESS STEEL CONNECTING SHELF				
	GRPFS	PLASTIC COATED CONNECTING SHELF				
	BGN11P	2 PLASTIC FOODSAFE CONTAINERS GN 1/1 WITHOUT LID				
	B21F6	2/1 GN STAINLESS STEEL CONTAINER, H 65 MM	65X53X6,5			
	B21F4	2/1 GN STAINLESS STEEL CONTAINER, H 40 MM	65X53X4			
	B21F2	2/1 GN STAINLESS STEEL CONTAINER, H 20 MM	65X53X2			

GAMMA  
700 mm

ICON9000  
920 mm

ICON9000 PLUS  
920 mm

OMEGA  
1100 mm











MONOLITHE

ACT.O - FX - BX -  
FIT combi

CHILL  




## ACCESSORIES

	MOD.	DESCRIZIONE	 cm	 kW	 kW	
	<b>CGXME</b>	AISI 304 STAINLESS STEEL SLIDES FOR REFRIGERATORS WITH PREFORMED WALLS 2 COLUMNS	1,3X63X2,3			
	<b>GC80X</b>	STAINLESS STEEL MEAT HANGING SHELF GN 2/1 WITH 4 HOOKS	65X53,4X1,5			
	<b>PPRX140</b>	EXTRA FOOT FOR 2 COLUMN REFRIGERATORS FOR LOADS <200 KG	10X10X15			
	<b>KRPRVX</b>	4 SWIVELLING WHEELS ON AISI 304 STAINLESS STEEL PLATE				
	<b>GR70AL</b>	REMOTE COOLING UNIT -2°C ÷ +8°C	48X60X30	0,54		230V 1N~ / 50HZ
	<b>GR70AB</b>	REMOTE COOLING UNIT -20°C ÷ -10°C	48X60X33	0,68		230V 1N~ / 50HZ
	<b>GR150AL</b>	REMOTE COOLING UNIT -2°C ÷ +8°C	48X60X31	0,75		230V 1N~ / 50HZ
	<b>GR150AB</b>	REMOTE COOLING UNIT -20°C ÷ -10°C	48X60X35	1,6		230V 1N~ / 50HZ
	<b>KCGR</b>	REMOTE COOLING UNIT COVERING	52X64,2X42			

# REFRIGERATORS

## FREE-GO GN 2/1

Model EF... refrigerators with one-piece construction internal and external in special ANTI-FINGERPRINT steel.

Model EX... refrigerators with one-piece construction, internal and external made of AISI 304 stainless steel. Capacity GN 2/1. Each compartment is delivered as standard with n. 3 plastic coated grids.

	MOD.	DESCRIZIONE				
	 EF70T	REFRIGERATOR 0°C ÷ +10°C GN 2/1 ANTI-FINGERPRINT STEEL	75X83,5X204	0,27		230V 1N~ / 50HZ
	 EF70B	FREEZER -20°C ÷ -10°C GN 2/1 ANTI-FINGERPRINT STEEL	75X83,5X204	0,75		230V 1N~ / 50HZ
	EF150T	REFRIGERATOR 0°C ÷ +10°C GN 2/1 ANTI-FINGERPRINT STEEL	150X83,5X204	0,42		230V 1N~ / 50HZ
	EF150B	FREEZER -20°C ÷ -10°C GN 2/1 ANTI-FINGERPRINT STEEL	150X83,5X204	0,95		230V 1N~ / 50HZ
	 EX70L	REFRIGERATOR -2°C ÷ +8°C GN 2/1	75X83,5X204	0,43		230V 1N~ / 50HZ
	 EX70B	FREEZER -20°C ÷ -10°C GN 2/1	75X83,5X204	0,75		230V 1N~ / 50HZ
	EX150L	REFRIGERATOR -2°C ÷ +8°C GN 2/1	150X83,5X204	0,58		230V 1N~ / 50HZ
	EX150B	FREEZER -20°C ÷ -10°C GN 2/1	150X83,5X204	0,95		230V 1N~ / 50HZ

GAMMA  
700 mm

ICON9000  
920 mm

ICON9000 PLUS  
920 mm

OMEGA  
1100 mm

MONOLITHE

ACT.O - FX - BX -  
FIT combi

CHILL  
  



# REFRIGERATORS

## FREE-GO 2/1 GN SPECIAL

Model EX... refrigerators with one-piece construction, internal and external made of AISI 304 stainless steel. Capacity GN 2/1. Each compartment is delivered as standard with n. 3 plastic coated grids and 3 couples of guides. Delivered as standard by models ....CP: 5 pairs of telescopic guides in AISI 304 stainless

steel and 10 GN 1/1 h = 150 mm plastic containers. Models ...LL/LB delivered as standard with 2 plastic coated grids and 2 couples of guides each compartment. Models ...PV: installation allowed to an altitude up to 800 metres above sea level.

GAMMA  
700 mm

ICON9000  
920 mm

ICON9000 PLUS  
920 mm

OMEGA  
1100 mm

MONOLITHE

ACT.O - FX - BX -  
FIT combi

CHILL  
❄️❄️❄️

❄️

MOD. DESCRIZIONE



EX70TPV

REFRIGERATOR WITH GLASS DOOR  
0°C ÷ +10°C GN 2/1

75X83,5X204

0,25

230V 1N~ /  
50HZ



EX70CP

REFRIGERATOR FOR FISH -6°C ÷  
+6°C GN 2/1

75X83,5X204

0,58

230V 1N~ /  
50HZ



EX70LL

REFRIGERATOR -2°C ÷ +8°C / -2°C  
÷ +8°C GN 2/1

75X81,5X204

0,8

230V 1N~ /  
50HZ

EX70LB

REFRIGERATOR -2°C ÷ +8°C / -20°C  
÷ -10°C GN 2/1

75X81,5X204

0,87

230V 1N~ /  
50HZ



EX150BL

REFRIGERATOR -2°C ÷ +8°C / -20°C  
÷ -10°C GN 2/1

150X83,5X204

1,05

230V 1N~ /  
50HZ



EX150TPV

REFRIGERATOR WITH GLASS  
DOORS 0°C ÷ +10°C GN 2/1

150X83,5X204

0,42

230V 1N~ /  
50HZ

# REFRIGERATORS

## FREE-GO ACCESSORIES

DLUSB detects and records the temperature and humidity of the compartment. TTLINK...: compatible with Android 4.4 (or superior) devices and Blue-Tooth 4.0 or BLE 4.0, maximum distance 10 m, it can be installed on refrigerated cabinets FREE-GO (models ..CP and ...LB excluded).

### ACCESSORIES

	MOD.	DESCRIZIONE				
	TTLINK	THERMOSTAT-THERMOMETER -2°C ÷ +8°C BLUE TOOTH 4.0 - ANDROID				
	TTLINKZ	THERMOSTAT-THERMOMETER 0°C ÷ +10°C BLUE TOOTH 4.0 - ANDROID				
	TTLINKB	THERMOSTAT-THERMOMETER -20°C ÷ -10°C BLUE TOOTH 4.0 - ANDROID				
	DLUSB	TEMPERATURE AND HUMIDITY DETECTOR-RECORDER				
	GP21	FOODSAFE PLASTIC COATED SHELF GN 2/1	53X65X6,3			
	GP21B	PLASTIC COATED SHELF 2/1 GN FOR VERT.BOTTLES	53X65X6			
	G610X	GRID GN 1/1 MADE IN ROUND STAINLESS STEEL	53X32,5X1,2			
	G785X	GRID GN 2/1 MADE IN ROUND STAINLESS STEEL	53X65X6,3			
	BGN11P	2 PLASTIC FOODSAFE CONTAINERS GN 1/1 WITHOUT LID				
	BP21	PLASTIC CONTAINER GN 2/1 WITHOUT LID	53X65X20			
	B21F6	2/1 GN STAINLESS STEEL CONTAINER, H 65 MM	65X53X6,5			
	B21F4	2/1 GN STAINLESS STEEL CONTAINER, H 40 MM	65X53X4			
	B21F2	2/1 GN STAINLESS STEEL CONTAINER, H 20 MM	65X53X2			
	C151	STAINLESS STEEL WIRE BASKET GN 1/1	53X32,5X15			

GAMMA  
700 mm

ICON9000  
920 mm

ICON9000 PLUS  
920 mm

OMEGA  
1100 mm












MONOLITHE

ACT.O - FX - BX -  
FIT combi

CHILL  
  










## ACCESSORIES

	MOD.	DESCRIZIONE	 cm	 kW	 kW	
	<b>GPR</b>	PLASTIC- COATED CONNECTING SHELF	25,5X54X2,3			
	<b>GXR</b>	AISI 304 STAINLESS STEEL CONNECTING SHELF	25,5X54X2,3			
	<b>CGX</b>	TWO S/S SHELF SLIDES FOR SHELVES AND CONTAINERS				
	<b>CGPS</b>	COUPLE OF GUIDES FOR PASTRY CONTAINERS				
	<b>MAFPS4</b>	UPRIGHTS FOR PASTRY USE OF REFRIGERATOR	11X120X9			
	<b>GC80X</b>	STAINLESS STEEL MEAT HANGING SHELF GN 2/1 WITH 4 HOOKS	65X53,4X1,5			
	<b>PPRX140</b>	EXTRA FOOT FOR 2 COLUMN REFRIGERATORS FOR LOADS <200 KG	10X10X15			
	<b>KRPRVX</b>	4 SWIVELLING WHEELS ON AISI 304 STAINLESS STEEL PLATE				
	<b>KPAF</b>	PEDAL OPENING FOR REFRIGERATORS ONE COLUMN	8X26X11,5			









# REFRIGERATORS

## FREE-GO GN 73,5 CM DEPTH

Model EX... refrigerators with one-piece construction, internal and external made of AISI 304 stainless steel. Each compartment is delivered as standard with n. 3 plastic coated grids.  
TTLINK...: compatible with Android 4.4 (or superior) devices and Blue-Tooth 4.0 or BLE 4.0, maximum distance 10 m.

	MOD.	DESCRIZIONE				
	EX60L	REFRIGERATOR -2°C ÷ +8°C	75X73,5X204	0,43		230V 1N~ / 50HZ
	EX60B	FREEZER -20°C ÷ -10°C	75X73,5X204	0,75		230V 1N~ / 50HZ
	EX130L	REFRIGERATOR -2°C ÷ +8°C	150X73,5X204	0,58		230V 1N~ / 50HZ
	EX130B	FREEZER -20°C ÷ -10°C	150X73,5X204	0,95		230V 1N~ / 50HZ

### ACCESSORIES

	MOD.	DESCRIZIONE				
	TTLINKZ	THERMOSTAT-THERMOMETER 0°C ÷ +10°C BLUE TOOTH 4.0 - ANDROID				
	TTLINKB	THERMOSTAT-THERMOMETER -20°C ÷ -10°C BLUE TOOTH 4.0 - ANDROID				
	GP70	CLASSIFIED FOODSAFE PLASTIC-COATED SHELF	53X55X6,3			
	G70X	AISI 304 STAINLESS STEEL GRID FOR REFRIGERATOR 73.5 CM DEPTH	53X55X6,3			
	GPR70	PLASTIC COATED CONNECTING SHELF	25,5X48X2			
	CGX70	TWO S/S SHELF SLIDES FOR SHELVES AND CONTAINERS				

GAMMA  
700 mm

ICON9000  
920 mm

ICON9000 PLUS  
920 mm

OMEGA  
1100 mm






MONOLITHE

ACT.O - FX - BX -  
FIT combi

CHILL  




## ACCESSORIES

	MOD.	DESCRIZIONE	 cm	 kW	 kW	
	KRPRVX	4 SWIVELLING WHEELS ON AISI 304 STAINLESS STEEL PLATE				
















# REFRIGERATORS

## ROLL-IN AND PASS-THROUGH

Refrigerators with structure made of panels in AISI 304 stainless steel. Model TDRI for trolley. Model TDPT pass-through, for trolley. DLUSB detects and records the temperature and humidity of the compartment. TSP allows to record and print internal temperature and the pcb functions. Connectable

through serial cable to the control board of appliances. For models X-CEL and Roll-in only.

	MOD.	DESCRIZIONE				
	TDRI	REFRIGERATOR +2°C ÷ +10°C FOR TROLLEYS	105,5X105,5X225,5	0,39	230V 1N~ / 50HZ	
	TDPT	REFRIGERATOR +2°C ÷ +10°C PASS-THROUGH FOR TROLLEYS	105X113X225	0,39	230V 1N~ / 50HZ	
<b>ACCESSORIES</b>						
	MOD.	DESCRIZIONE				
	DLUSB	TEMPERATURE AND HUMIDITY DETECTOR-RECORDER				
	TSP	PRINTING TERMINAL	10X10X10	0,012	230V 1N~ / 50 ÷ 60HZ	
	CRG2021	TROLLEY FOR 18 CONTAINERS GN 2/1	65X72X171			

GAMMA  
700 mm

ICON9000  
920 mm

ICON9000 PLUS  
920 mm

OMEGA  
1100 mm

MONOLITHE

ACT.O - FX - BX -  
FIT combi

CHILL  




GAMMA  
700 mm

ICON9000  
920 mm

ICON9000 PLUS  
920 mm

OMEGA  
1100 mm

MONOLITHE

ACT.O - FX - BX -  
FIT combi

CHILL  
❄️❄️❄️



Versò - Italy